

NSA-01

Scan & Send Your Documents in Just a Few Easy Steps

With the Network Scanning Adapter NSA-01, you can scan paper documents and distribute them to multiple users through your LAN, the Internet, or even as a fax. And though it's compact, the NSA-01 includes a large, easy-to-use operation panel and is loaded with convenient features. Use it to get the most out of your Canon document scanner.



The NSA-01 gives you so many options: LAN-based distribution to a database, FTP server or printer, or delivery through email, fax or Internet fax.

Database

Fax

Take advantage of a remarkably simple workflow. All operations, from selecting the receiver to starting the scanner, can be handled from the pen-operated LCD touch panel.




Ideal for many users! The NSA-01 supports over 1,000 users, and each user enjoys secure access to his or her account. Many handy functions are provided.

@

Network Scanning Adapter NSA-01

System Configuration

The NSA-01 connects to your Canon document scanner with a SCSI cable, and to your network using 10Base-T/100Base-TX. There is an application program for the NSA-01 that runs on a networked PC, but you do not need to dedicate the computer to running the application—other people are free to use this PC for other tasks.


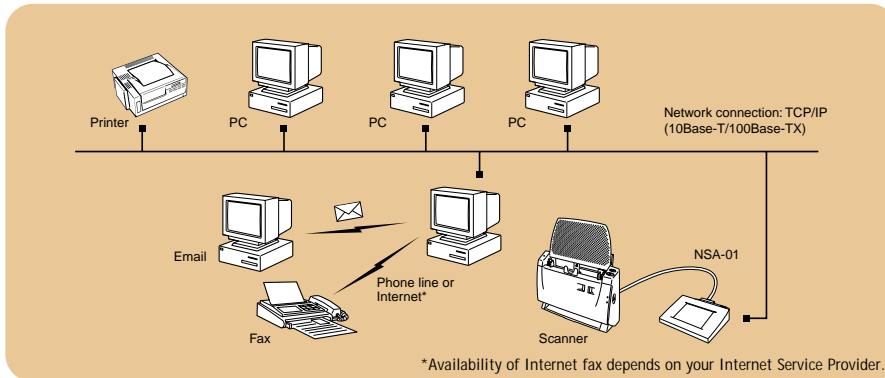


Convenient from Start to Finish

At every step of the way, the NSA-01 offers handy functions that enhance your productivity with document scanning tasks. Here's the workflow.


● Password Protection

When you get started, the NSA-01 asks for your password to ensure that your information stays secure. A keyboard-style display serves as your interface.



● Address Books and Groups

Next, you specify who will receive your data by selecting names from an address book. You can also create groups of people and targets to send documents to.



● Scanner Settings

Now you can control the scanner from the NSA-01. Adjust brightness, scan resolution, and other scan settings to best match your job. Different file formats are provided, including PDF with embedded OCR data.

● Additional Features

Search functions for address searches • Write email messages with signatures added • Log files of scanner use, exportable in CSV format • Power saving mode

NSA-01 Specifications

MAIN UNIT

Type	Desktop-type network scanning adapter
Operation panel	5.6-inch LCD touch panel
Scanner interface	SCSI-2 (50-pin half-pitch)
Network connector	RJ-45 (10Base-T/100Base-TX)
Power supply	DC15V
Power consumption	Max. 9W
AC adapters	100 – 120V or 220 – 240V
Operating environment	10 – 32.5°C, 20 – 80%RH
Dimensions (W x D x H)	197 x 160 x 49 mm
Weight	0.76 kg (including touch pen)

SYSTEM SPECIFICATIONS

Compatible network	Microsoft Windows network based
Operating systems	Microsoft Windows 98 SE, Windows Me, Windows NT4.0 Workstation/Server, Windows 2000 Professional/Server, Windows XP Professional
Network protocol	TCP/IP
IP address	Fixed address or automatic assignment (DHCP supported)
Data receivers	Shared folder, printer, FTP server, fax, email, Internet fax, Canon iW Gateway, multicasting transmission
Control PC	CPU: Pentium II 400MHz or faster; RAM: 256MB or more; 300MB or more free hard disk space
Compatible scanners	(As of October, 2002) DR-2080C, DR-3060, DR-3080C

Specifications are subject to change without notice. Product names appearing herein are the trademarks and/or registered trademarks of their respective owners.

Canon CANON ELECTRONICS INC.

1248, Shimokagemori, Chichibu-shi, Saitama 369-1892, Japan

CANON U.S.A. INC.
New York Office/Headquarters: One Canon Plaza, Lake Success, NY 11042, U.S.A. Tel: (516) 328-5000

CANON CANADA, INC.
Toronto Office/Headquarters: 6390 Dixie Road Mississauga, Ontario L5T 1P7, Canada Tel: (905) 795-1111

CANON EUROPA N.V.
Bovenkerkerweg 59-61, P.O. Box 2262, 1180 EG Amstelveen, The Netherlands Tel: (020) 545-8545

CANON LATIN AMERICA, INC.
703 Waterford Way, Suite 400, Miami, Florida 33126, U.S.A. Tel: (305) 260-7400

CANON AUSTRALIA PTY. LTD.
1 Thomas Holt Drive, North Ryde, Sydney, N.S.W. 2113, Australia Tel: (02) 9805-2000

CANON SINGAPORE PTE. LTD.
79 Anson Road #09-01/06, Singapore 079906 Tel: 6532-4400

CANON HONGKONG COMPANY LTD.
9/F, The Hong Kong Club Building, 3A Chater Road, Central, Hong Kong Tel: 2739-0802